





MRK SERIES SCREW CONNECTION EARTH RAIL TERMINAL BLOCKS




**MTK 10**  
Order No: 1294

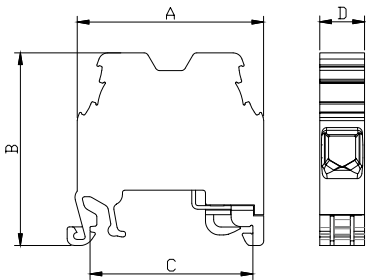

Dimensions (mm)	A	B	C	D
	40	41,3	34,5	9,6
MATERIAL				
Body	PA6.6			
Bridge	Copper			
Contact	CK45 Steel			
Screw	Steel			
The Foot Which Contact to the Rail	Brass			
Temp.	-40 °C, +140 °C			
Cable Strip L.	10 mm			
Torque	0,8 Nm			
DATA	TSE / CE	UL		
Voltage	750 V	600 V		
Section	10 mm <sup>2</sup>	8 AWG		
Norm	EN-60947-7-2	UL 1059		
Pcs	100			
ACCESSORIES				
Stopper	1202,1222,1212			
Group Sticker	1232			
Marking	9770 / 4442 / 9540 / 2630 / 7301			



**MTK 25**  
Order No: 1297

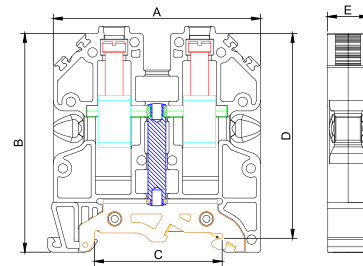

Dimensions (mm)	A	B	C	D	E
	58,2	63,5	34,5	57	11,6
MATERIAL					
Body	PA6.6				
Bridge	Copper				
Contact	CK45 Steel				
Screw	Steel				
The Foot Which Contact to the Rail	Brass				
Temp.	-40 °C, +140 °C				
Cable Strip L.	16 mm				
Torque	1,2 Nm				
DATA	TSE / CE				
Voltage	750 V				
Section	25 mm <sup>2</sup>				
Norm	EN-60947-7-2				
Pcs	50				
ACCESSORIES					
Stopper	1202,1222,1212				
Group Sticker	1232				
Marking	9770 / 4442 / 9540				

With Non - Insulated Cord End Terminals